


Geberit Mepla adapter with male thread

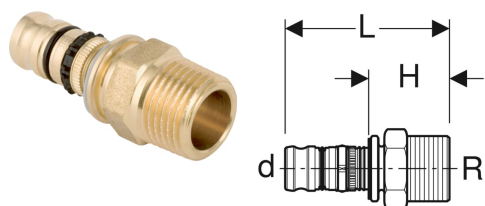

Example image

Application purposes

- For chemicals and technical liquids
- For extinguishing water (wet/dry, dry)
- For extinguishing water (wet)
- For cold and hot potable water
- For heating water
- For cooling water without antifreeze agent
- For cooling water with antifreeze agent
- For compressed air (oil purity class 0-3)
- For negative pressure

- For inert gases (e.g. nitrogen)
- For technical building systems, industry and shipbuilding

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material | Brass CW617N

Art. no.	DN	d, ø	R	L	H
611.534.00.5	12 / 10	16 mm	3/8 "	5.4 cm	2.9 cm
611.535.00.5	12 / 15	16 mm	1/2 "	5.4 cm	2.8 cm
612.534.00.5	15 / 10	20 mm	3/8 "	5.7 cm	3 cm
612.535.00.5	15	20 mm	1/2 "	5.7 cm	3 cm
612.536.00.5	15 / 20	20 mm	3/4 "	5.9 cm	3 cm
613.535.00.5	20 / 15	26 mm	1/2 "	6.3 cm	3 cm
613.536.00.5	20	26 mm	3/4 "	6.4 cm	3.1 cm
613.537.00.5	20 / 25	26 mm	1 "	6.7 cm	3.4 cm
614.537.00.5	25	32 mm	1 "	6.4 cm	3.5 cm