


Geberit HDPE double branchball 88.5°, connections 180° offset

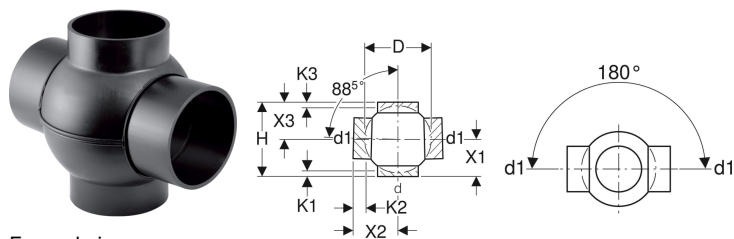

Example image

Application purposes

- For building drainage

Technical data

Product material

PE-HD

Characteristics

- UV-resistant

Art. no.	DN	d, ø	d1, ø	arc	arc2	D	H	X1	X2	X3	K1	K2	K3
364.270.16.1	60 / 60	63 mm	63 mm	88.5°	180°	10 cm	16 cm	8 cm	10 cm	8 cm	1.5 cm	4.5 cm	1.5 cm
365.275.16.1	70 / 70	75 mm	75 mm	88.5°	180°	12 cm	16 cm	8 cm	10 cm	8 cm	1.5 cm	3.5 cm	1.5 cm
366.280.16.1	90 / 90	90 mm	90 mm	88.5°	180°	14 cm	18 cm	9 cm	11 cm	9 cm	2 cm	4 cm	2 cm
367.262.16.1	100 / 40	110 mm	50 mm	88.5°	180°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.265.16.1	100 / 56	110 mm	56 mm	88.5°	180°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.270.16.1	100 / 60	110 mm	63 mm	88.5°	180°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.275.16.1	100 / 70	110 mm	75 mm	88.5°	180°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.280.16.1	100 / 90	110 mm	90 mm	88.5°	180°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.285.16.1	100 / 100	110 mm	110 mm	88.5°	180°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	4 cm	1.5 cm
368.285.16.1	125 / 100	125 mm	110 mm	88.5°	180°	18 cm	20 cm	10 cm	12.5 cm	10 cm	1.5 cm	4 cm	1.5 cm
369.285.16.1	150 / 100	160 mm	110 mm	88.5°	180°	23 cm	25 cm	12.5 cm	16 cm	12.5 cm	2 cm	1.5 cm	2 cm